



 **REDJACKET SERIES**

1DW

SUBMERSIBLE DEWATERING PUMP WASTEWATER

FEATURES

- **Impeller:** AISI 304 SS open impeller.
- **Diffuser Plate:** AISI 304 SS with Polyurethane coating for maximum resistance to abrasion.
- **Casing:** AISI 304 SS.
- **Mechanical Seal:** Silicon carbide sealing faces, all metal components of AISI type 300 stainless steel running in protected oil chamber.
- **Elastomers:** BUNA-N.
- **Shaft:** AISI type 304 stainless steel high strength pump shaft with keyed and locking cap screw impeller fastening.
- **Motor:** Air filled class F insulated design for continuous use.
- **Designed for Continuous Operation:** Pump ratings are within the motor's working limits and can be operated continuously without damage.
- **Bearings:** Upper and lower heavy duty ball bearing construction.

APPLICATIONS

Specifically designed for the following uses:

- Handling dirty waters
- Draining ditches and pits
- Excavating in the building trades
- Water transfer
- Industrial water drainage or transfer


SPECIFICATIONS

Pump:

- Discharge size: 1½" NPT.
- Capacities: up to 110 GPM.
- Total heads: up to 66 feet TDH.
- Max. solids: ¾" spherical.
- Mechanical seal: Silicon carbide rotary/silicon carbide stationary, 300 series stainless steel metal parts, BUNA-N elastomers.
- Maximum submergence: 23'.
- Temperature limit: 120°F (50°C) maximum.
- Fasteners: 300 series stainless steel.

Motor:

- Single phase: 60 Hz, 3500 RPM, ½ HP, 115 and 230 V; ¾ and 1 HP, 230 V only.
- Three phase: 60 Hz, 3500 RPM, ½ to 1½ HP, 230 or 460 V.
- Built-in thermal overload protection with automatic reset on single phase models.
- Three phase: Overload protection must be provided in starter unit with three phase pumps.
- Power cord: ½ HP 30' cord; all other HP's 20' cord
- Class F insulation.

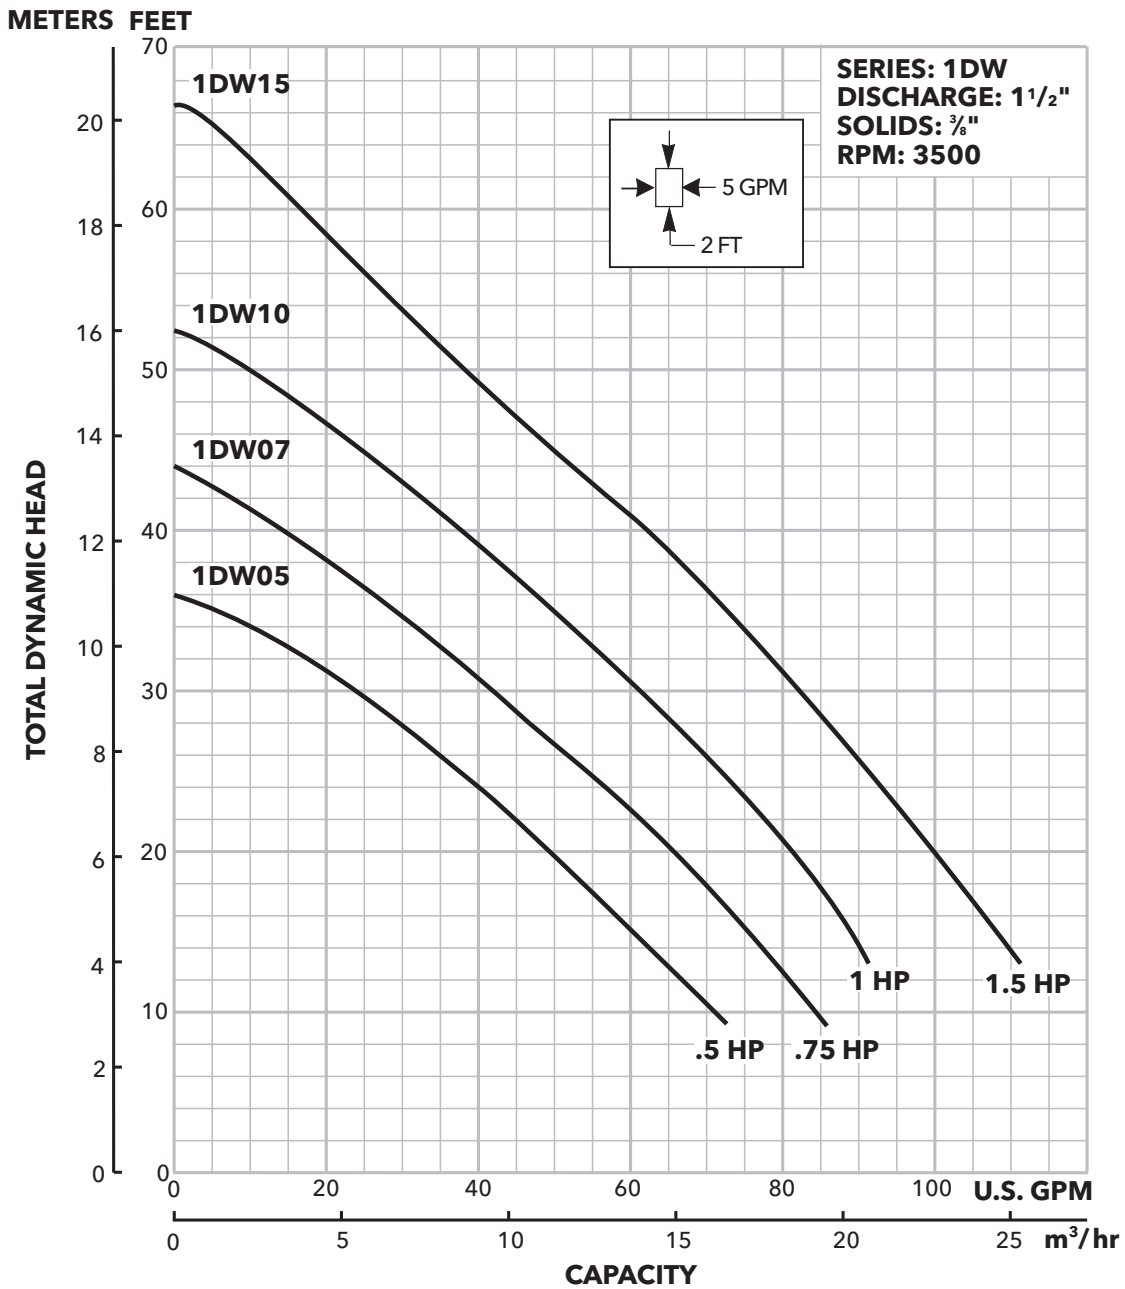


MECHANICAL DATA


Order No.	HP	Volts	Phase	Maximum Amps	RPM	Weight (lbs.)
1DW0511	1/2	115	1	10.3	3450	29
1DW0512		230		4.5		
1DW0532		460	3	2.5		27
1DW0534				1.3		
1DW0712	3/4	230	1	5.7		32
1DW0732			3	3.6		29
1DW0734		460		1.8		
1DW1012		1	230	1		6.3
1DW1032	3			4.0	33	
1DW1034			460	2.0		
1DW1532	1 1/2		230	3	5.6	37
1DW1534		460	2.7			

DIMENSIONS

(All dimensions are in inches. Do not use for construction purposes.)

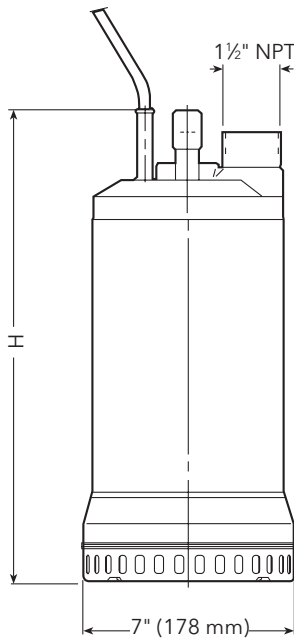

Series	HP	Phase	Dimensions in inches (mm)	Discharge Size
			H	
1DW	1/2	1	14 1/8 (363)	1 1/2"
		3	13 3/8 (348)	
	3/4	1	15 1/8 (383)	
		3	14 1/8 (363)	
	1	1	15 7/8 (403)	
		3	15 1/8 (383)	
1 1/2	3	15 7/8 (403)		



Component	Material
Pump body and motor casing	Stainless steel (AISI 304)
Outer sleeve	Stainless steel (AISI 304)
Impeller	Stainless steel (AISI 304)
Motor shaft	Stainless steel (AISI 304)
Suction strainer	Stainless steel (AISI 304)
Front diffuser plate	Stainless steel (AISI 304) coated with polyurethane elastomer
Lower mechanical seal	Silicon carbide/Silicon carbide
Upper lip seal	Nitrile rubber
Handle	Stainless steel (AISI 304) coated with polyacetalic resin

xylem
Let's Solve Water

Xylem Inc.
2881 East Bayard Street Ext., Suite A
Seneca Falls, NY 13148
Phone: (866) 325-4210
Fax: (888) 322-5877
goulds.com/redjacket

Red Jacket Water Products is a trademark of Xylem Inc. or one of its subsidiaries. Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.

© 2019 Xylem Inc. BRJ1DW R4 October 2019